


AM.3.VS... MODULAR SEQUENCING VALVES CETOP 3

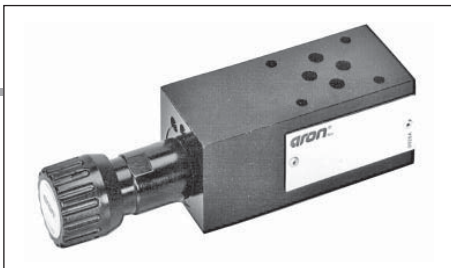

AM.3.VS...
CVS.20... BFP CARTRIDGE CATALOGUE
SCREWS AND STUDS CH. IV PAGE 21

The sequence valve are used to assure that a secondary circuit is pressurized when the setting pressure is reached.

These valves grant a minimum variation of the setting pressure with a changing flow up to 40 l/min (see diagram).

Three spring types allow adjustment within the range 7 ÷ 250 bar. Manual adjustment is available by a grub screw or plastic knob.


The cartridge used is the "CVS" type.

Max. operating pressure	350 bar
Setting ranges:	Spring 1 max. 60 bar
	Spring 2 max. 120 bar
	Spring 3 max. 250 bar
Max. flow	40 l/min
Draining on port T	0,5 ÷ 0,7 l/min
Hydraulic fluids	Mineral oils DIN 51524
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level	class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$
Weight	1,36 Kg


ORDERING CODE

- AM** Modular valve
- 3** CETOP 3/NG6
- VS** Sequencing valve
- *** Drain connection
E = External
I = Internal (Standard)
- *** Type of adjustment
M = Plastic knob
C = Grub screw
- *** Setting ranges
1 = max. 60 bar (white spring)
2 = max. 120 bar (yellow spring)
3 = max. 250 bar (green spring)
- **** 00 = No variant
V1 = Viton
- 1** Serial No


HYDRAULIC SYMBOL

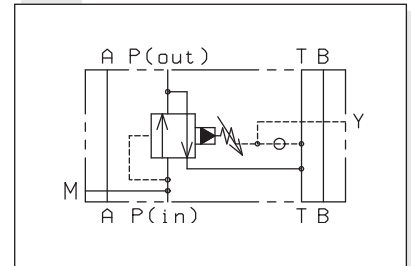


PRESSURE-FLOW RATE

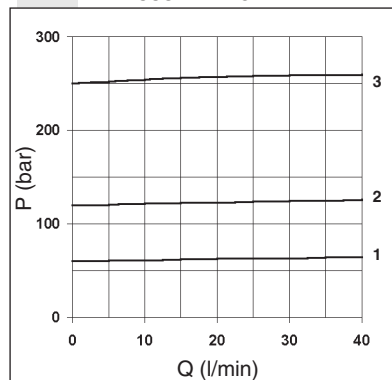

MINIMUM SETTING PRESSURE

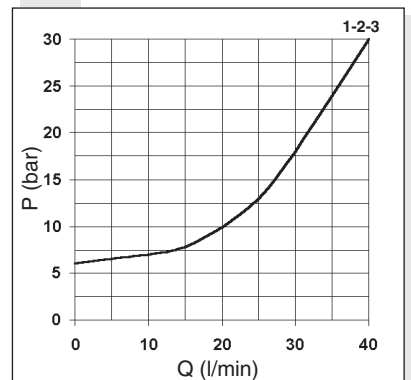

OVERALL DIMENSIONS

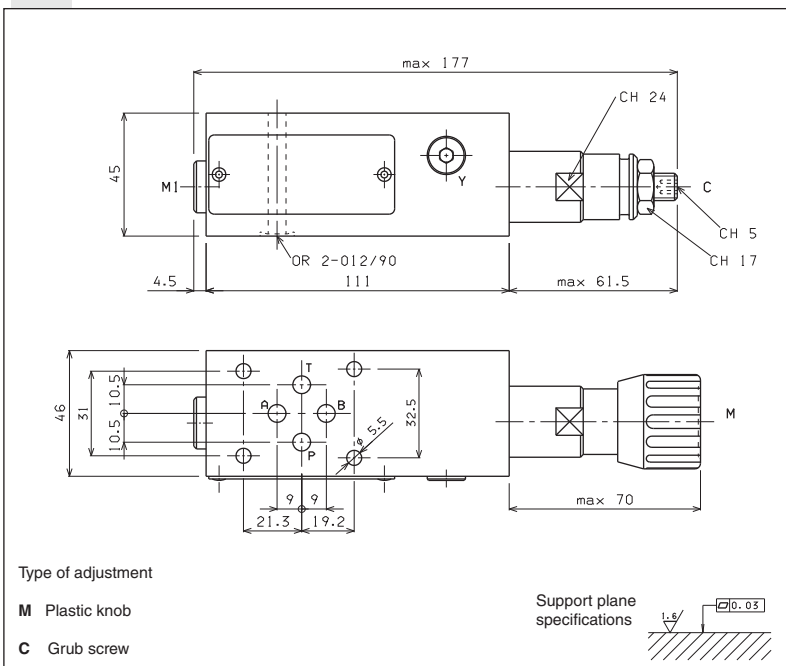

Curves n° 1 - 2 - 3 = setting ranges

The fluid used is a mineral oil with a viscosity of 46 mm²/s at 40°C. The tests have been carried out at a fluid temperature of 50°C.

To changes valves AM.3.VS... from internal to external drainage it is necessary:

- screw out the plug on the Y port
- screw out the plug T.C.E.I. M8x1 from the body
- screw in a screw S.T.E.I. M6
- rescrew the T.C.E.I. M8x1 plug on the body

NOTE: the external draining can be used as a piloting line (please, contact our Technical Service for other informations)