

# AM.88... MODULAR COMPENSATED FLOW CONTROL ASSEMBLY CETOP 5




This is an intermediate block (AM.88) for modular mounting of one or two compensated flow rate regulators QC.3...

The flow regulator type QC32 must be ordered separately.

Max. operating pressure	320 bar
Hydraulic fluids	Mineral oils DIN 51524
Fluid viscosity	10 ÷ 500 mm <sup>2</sup> /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level	class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$
Weight	2,75 Kg

<b>AM.88...</b>	
QC.3.2...	CH. III PAGE 2
SCREWS AND STUDS	CH. IV PAGE 36

## HYDRAULIC SYMBOLS

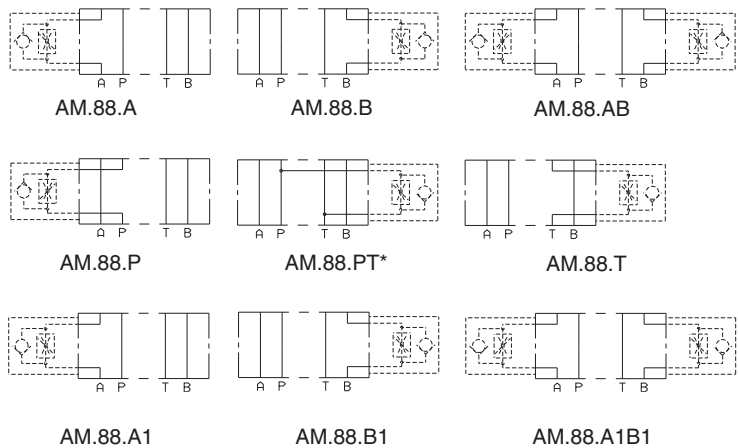

PT \* = From line towards exhaust (P → T drain)

• In order to obtain versions A1, B1 and A1B1 the AM.88.B, AM.88.A or AM.88.AB regulators carrying block should be turned by 180°.

## ORDERING CODE

<b>AM</b>	Modular valve
<b>88</b>	Size
<b>**</b>	Control on lines <b>A / B / P / T / PT* / AB</b> For A1 / B1 / A1B1 see table "Hydraulic symbols"
<b>**</b>	<b>00</b> = No variant <b>V1</b> = Viton
<b>3</b>	Serial No.

## OVERALL DIMENSIONS

K = OR plate

